



High friction mineral on a tough self-adhesive tape

A choice of abrasive grades to suit a wide range of applications.
Several stock colours and bespoke cutting options make this a truly versatile anti-slip solution.

Contents

The Safety-Grip concept	3	Safety-Grip - Thick	18
Grip underfoot - abrasive grades	4	Safety-Grip - Conformable	19
Colours and shapes	5	Safety-Grip - No-Stretch	20
Safety-Grip - Standard	6	Safety-Grip - Removable	21
Safety-Grip - Standard - Hazard	7	Safety-Grip - Removable - Hazard	22
Safety-Grip - Vivid - Hazard	8	Chemical Resistant Safety-Grip - Standard	23
Safety-Grip - Shaded - Hazard	9	Chemical Resistant Safety-Grip - Coarse	24
Safety-Grip - Opaque backing	10	Chemical Resistant Safety-Grip - Extra Coarse	25
Safety-Grip - Photoluminescent	11	Marine Safety-Grip	26
Safety-Grip - Photoluminescent - Hazard	12	Alternatives	27
Safety-Grip - GlowLine	13	Retailer packing & branding	28
Safety-Grip - Standard - Camouflage	14		
Safety-Grip - Mild	15		
Safety-Grip - Coarse	16		
Safety-Grip - Extra Coarse	17		

About this PDF

You can navigate between pages in this PDF by clicking the arrows at the lower right corner, or by using your keyboard up and down keys.

Links to other places in this PDF

[Links to information online](#)
(internet connection required)

[Colours and shapes](#)

[Heskins website](#)

The Safety-Grip concept - quality in every step

Tough Carrier - The backbone of the product. Usually film but with a metallic option for Removeable and Comformable variants. Our carriers are the most durable used for anti slip tapes, making it an extremely popular choice for industry. Thicker carriers won't break up like cheap tapes do which makes them last longer and stay neater looking, but actually aids removal in one piece when the time comes.

Underprint - We underprint a huge and growing range of colours including custom options. We can mix your specified Pantone or RAL colours and even photoluminescent options.

Adhesive - Adhesive – we constantly upgrade our adhesives to ensure they are class leading, in addition to our popular products we also produce removable, high tack and low energy adhesives

Custom printing - We can print anything on top of ,or underneath our safety-grip - your logo, your text and everything else.

Back in 1997, we developed the hard-wearing and effective product that is still to date our most popular range - Heskins Safety-GripTM - abrasive minerals applied to a self-adhesive filmic carrier.

High Grip surface – We know what the industry demands. We use many different mineral types and sizes to ensure you get the perfect solution. The abrasives are securely bonded to the carrier using multiple resin coats.

Cutting to any width

Grip underfoot - abrasive grades

A choice of abrasive grades to suit a wide range of applications. Several stock colours and bespoke cutting options make this a truly versatile anti-slip solution.



Standard – our most popular safety-grip, ideal for most situations, great levels of grip and friction



Coarse – a deep industrial grade abrasive non-slip material.



X-coarse – a unique product, nothing else in the world comes close, only suitable for industrial situations, the deep grit prevents clogging by dirt or dust. Due to its thickness, we apply a higher grade (HG) adhesive to prevent lifting, and a thicker plastic carrier is used to increase durability.




Mild - Mild – smaller grit granules are used to produce a material that still provides excellent abrasive grip but is preferable for situations where a finer abrasive is needed.



Colours & shapes

Whilst we use standard colours, the light reflectivity, and therefore the appearance, varies slightly with material type - see individual product pages for data

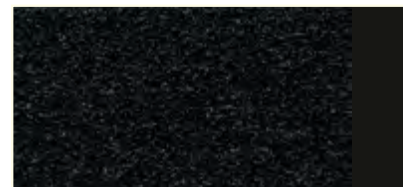

Black
Pantone Black 0
RAL 0




Yellow
Pantone 113
RAL 1023



Flourescent Yellow
Pantone 395U
RAL 1016



Red
Pantone 032U
RAL 3020

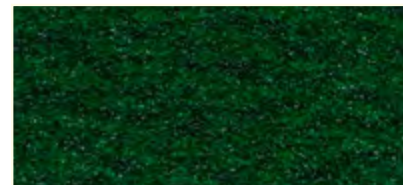


Green
Pantone 432U
RAL 6010




Grey
Pantone 428U
RAL 7004



Brown
Pantone 181U
RAL 8002

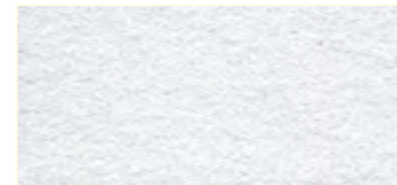

White
Pantone White
RAL White

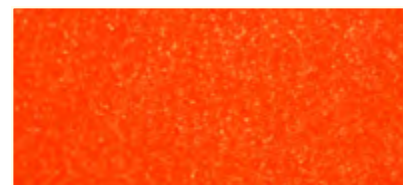

Orange



Beige



Camouflage
Mix of Black, Brown, Beige, Green



Hazard
Black / Yellow



Photoluminescent Green (approx)
Day Mild
Night Bright



Blue
Pantone 286U
RAL 5000




Transparent



Hazard
Red / White



Rolls can be cut to desired width.

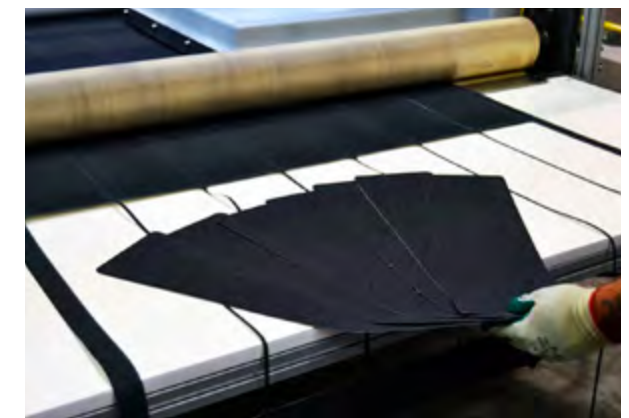

We have a range of standard cutters but any custom shape can be made.



Printed Safety-Grip

We are unique in having our own, in-house, full width printing line. We can print full colour both top surface and under surface.



Safety-Grip - Standard - H3401

- General purpose grit grade for most situations
- Internal and external application
- Water resistant



Extremely effective abrasive non-slip material. Permanent bond self-adhesive, suitable for a wide variety of applications.

Widths Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm. (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths Normally 18.3m, up to 100m. Special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslot retail pack

Colours & light reflectivity values

Colour	Code	Pan / RAL	Avg. LRV
Black	H3401N	Black U / 9004	0
Red	H3401R	032U / 3020	5.5
Yellow	H3401Y	113U / 1023	42.50
Blue	H3401B	286U / 5000	1.25
Green	H3401V	342U / 6010	2.25
Grey	H3401S	428U / 7004	23.50
Brown	H3401G	181U / 8002	0.25
White	H3401W		75.25
T Transparent	H3401T		
Fluorescent	H3401F	395U / 1016	100
Orange	H3401O		18.25
Beige	H3401E	4515U / 1019	
Camouflage	H3411C		

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)
- [R118 \(Burning behavior of materials used in the construction of commercial vehicles\)*](#)

*Login required

Safety-Grip - Standard - Hazard - H3401A/H3401D

- General purpose grit grade for most situations
- Internal and external application
- Water resistant
- Supplied in left hand and right hand orientation formats to allow perfect matching

Highly visible warning non-slip material.
45° contrasting stripes that are double-printed to ensure they are easily noticed.

Widths: Maximum 584mm, minimum with normal slitting 19mm, minimum width with special blades 10mm. (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).



Lengths: Normally 18.3m, up to 100m.
Special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslot retail pack



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black / Yellow Hazard - Double Print	H3401D		Black 0 - Yellow 37.5
	Red / White Hazard	H3401A		Red 4 - White 0

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)



300mm hazard tape

Safety-Grip - Vivid - Hazard - H3433D

- Noticeable and bright hazard material.
- Lighter colours compared to our others.



Highly visible black/yellow hazard safety-grip. Single print, the upper clear grit is the same used for clear H3401T.

Widths: Maximum 1180mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-GripTM



Colours & light reflectivity values

Colour	code	Pan / RAL	Avg. LRV
Black / Yellow	H3433D		0 / 37.5

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Safety-Grip -Shaded - Hazard - H3434D

- Tough hazard material in both black/yellow and red/white
- Top coated with aluminium oxide.

Highly visible black/yellow hazard safety-grip. Single print, the upper grit is the same used for H3401.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.



Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Safety-GripTM



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black / Yellow	H3434D		
	Red / White	H3434A		

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Opaque backing - H3407

- Opaque base film
- Ensures colours underneath will not show

An opaque backing is used to ensure that the yellow appears a perfect colour even if applied onto a dark base such as black.


Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Safety-GripTM

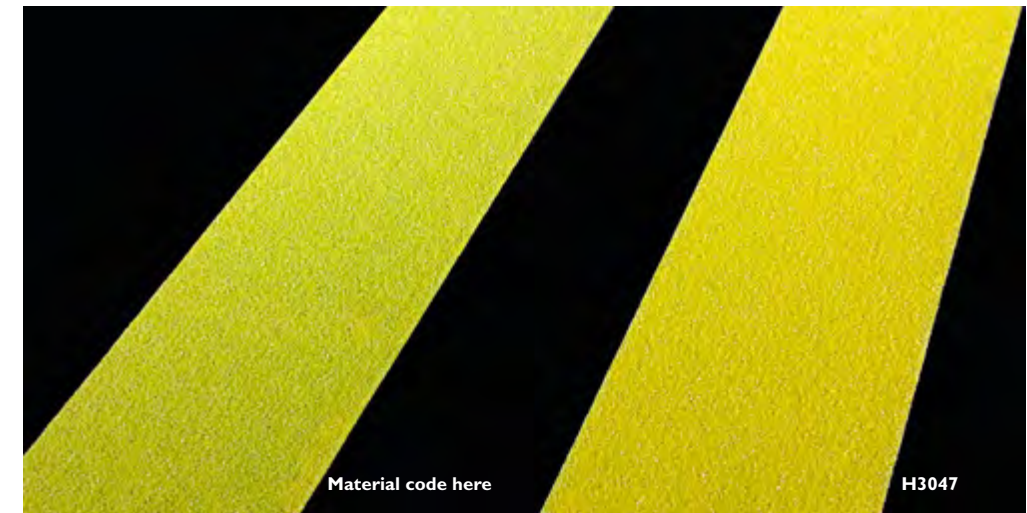

Colours & light reflectivity values

Colour	code	Pan / RAL	Avg. LRV
Yellow	H3407Y	113U / 1023	

Coefficient of Friction


Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [Product page on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Photoluminescent - H3403X

- Heskins Safety-Grip
- Photoluminescent, glow in the dark base with contrasting black chevrons
- Guides personnel during blackouts

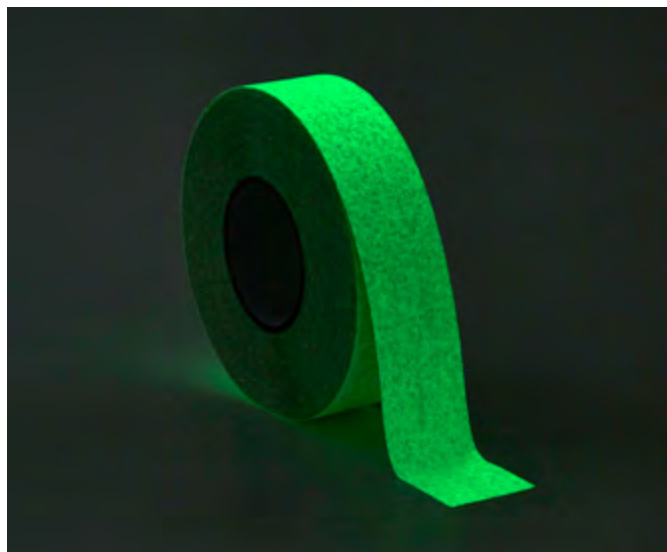

Abrasive non-slip with photoluminescent, glow in the dark, capabilities. Perfect for providing both anti slip and night glowing properties.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm.(MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m, up to 100m.
Special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Safety-GripTM



Colours & light reflectivity values

Colour	Avg. LRV
Mild green during lit conditions, Whitish green illuminated in a lights out setting	68

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Photoluminescent - Hazard - H3403D

- Heskins Safety-Grip
- Photoluminescent, glow in the dark base
- Guides personnel during blackouts




Abrasive non-slip with photoluminescent, glow in the dark, capabilities. Perfect for providing both anti slip and night glowing properties.

Widths: Maximum 584mm, minimum with normal slitting 19mm, minimum width with special blades 10mm.(MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m, up to 100m. Special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

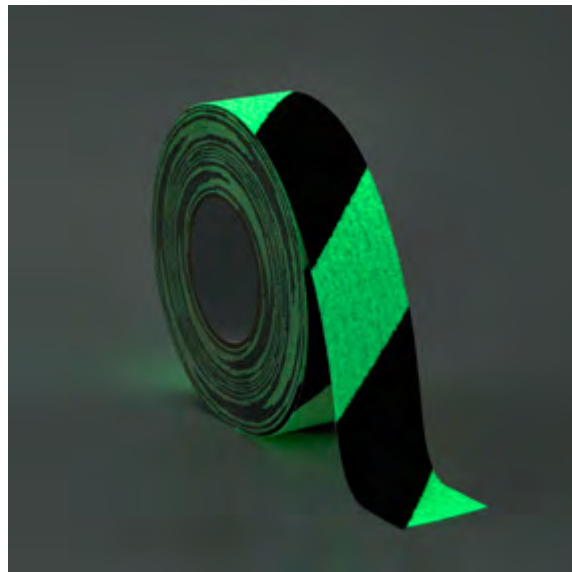

Colours & light reflectivity values

Colour	Avg. LRV
Mild green during lit conditions, a whitish green illuminated in a lights out situation.	68

Coefficient of Friction


Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - GlowLine - H3403N

- Cost effective anti-slip and glow in the dark performance
- Guides personnel in a lights out situation

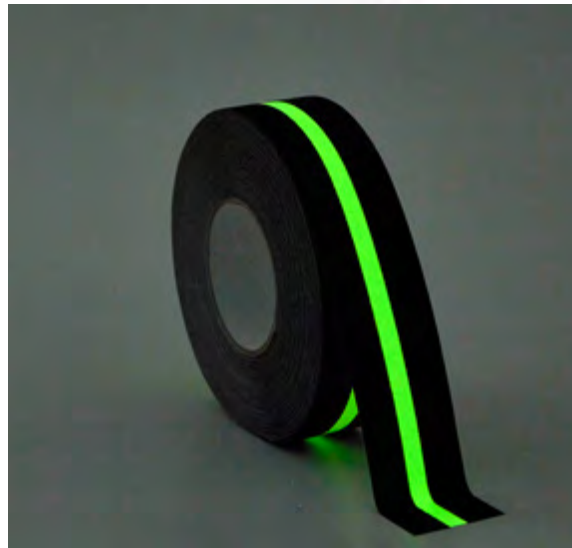

Our H3401N black safety-grip with a powerful strip of photoluminescent film running down the length, ideal for highlighting stairs and walkways.

Widths: 50mm wide only, for quantities on request others can be produced.

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

50mm x 18.3m



Colours & light reflectivity values

Colour	Avg. LRV
Black roll with a mild green strip (whitish green in a lights out situation)	68

Luminance test for centre strip

Time (minutes)	Luminance (mcd / m2)
5	11.8
10	4.6
20	1.6

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Standard - Camouflage - H3411C

- Effective camouflage pattern
- Standard safety-grip construction

Camouflage pattern standard grade safety-grip.

Widths: Maximum 1194mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.



Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslot retail pack



Light reflectivity values

Colour	code	Avg. LRV
Camouflage	H3411C	

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Mild - H3432

- Perfect for applications that demand a fine abrasive mineral
- Very small aluminium oxide granules

A very mild abrasive non-slip material, designed for applications where something abrasive is needed but not too harsh.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Safety-GripTM



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black	H3432N	Black U / 9004	0



Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Coarse - H3402

- **Coarser surface to prevent clogging by dust and mud**
- **Suitable for construction and heavy duty sites**
- **Water resistant**



A tough durable abrasive non-slip material. Perfect for heavy duty applications, does not clog easily with thick granules of aluminium oxide.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm. (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m, up to 100m. Special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-GripTM



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black	H3402N	Black U / 9004	0
	Yellow	H3402Y	113U / 1023	38.25
	Black / Yellow Hazard	H3402D		
	Green	H3402V	342U / 6010	1.50

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Safety-Grip - X-Coarse - H3402NUC

- **Coarser surface to prevent clogging by dust and mud**
- **Suitable for construction and heavy duty sites**
- **Water resistant**



The toughest anti slip tape in the world; thick abrasive grains, a thicker than normal plastic base combined with a high-grab adhesive designed to adhere into even difficult surfaces.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm. (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m, up to 100m. Special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslot retail pack

Safety-GripTM



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black	H3402NUC	Black U / 9004	0
	Green	H3402VUC	342U / 6010	

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [R118 \(Burning behavior of materials used in the construction of commercial vehicles\)*](#)

* Login required

Safety-Grip - Thick - H3404

- Suitable for recess application
- Unique 2mm thickness
- Available in widths from 20mm to 1170mm



2mm thick abrasive safety-grip, perfect for stair nosing inserts. Can be slit, like all our products, to specific tolerances.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m, up to 50m, special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslot retail pack

Safety-Grip™



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black	H3404N	Black U / 9004	0
	Yellow	H3404Y	109U / 1003	39.67

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [R118 \(Burning behavior of materials used in the construction of commercial vehicles\)*](#)

* Login required

Safety-Grip - Conformable - H3406

- For use on uneven surfaces such as durbar tread
- Aluminium foil backing
- Reduces risk of anti-slip lifting from uneven surfaces



Foil based abrasive anti slip tape, due to not being plastic based it has no memory so perfect for applying onto irregular surfaces (chequer, durbar plate). Secondary application of extreme fire resistance.

Widths: For plain colours the maximum width is 980mm, for H3406D it is 508mm, minimal normal slitting 19mm.

Lengths: Normally 18.3m, up to 50m, special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black	H3406N	Black U / 9004	0
	Yellow	H3406Y	113U / 1023	37.5
	Black / Yellow Hazard	H3406D		0 / 43.5
	Orange	H3406O	021U / 1003	18.25
	White	H3406W		72.25

Coefficient of Friction


Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - No-Stretch - H3420

- **Almost zero stretch tolerances**
- **Under-base lamination used**
- **Designed to ensure dimensional accuracy for the lifetime of the material**

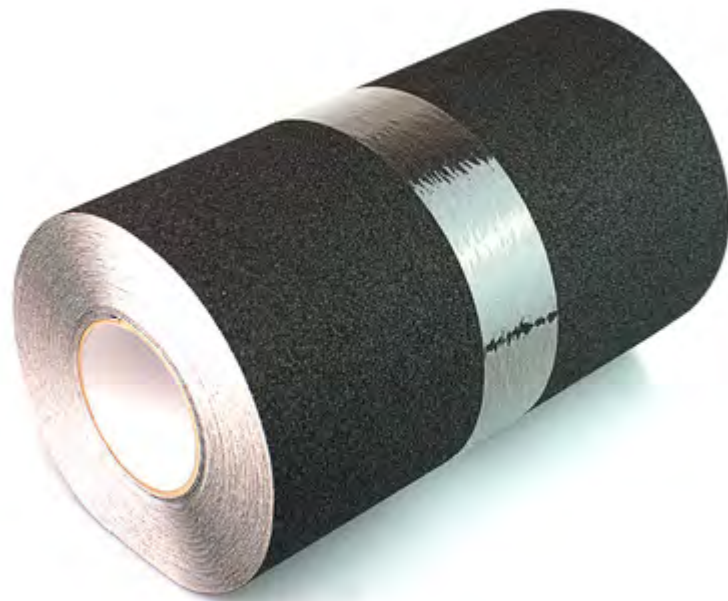

A zero stretch tolerance version of black standard, designed for applications where the applicator (person or machine) may apply tension and stretch the product, keeps a 100% consistent dimension however applied.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Up to 100m, special short length retail rolls can be produced.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslot retail pack

Safety-GripTM



Colours & light reflectivity values

Colour	code	Pan / RAL	Avg. LRV
Black	H3420N	Black U / 9004	0

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Removable - H3427

- Ensures clean removal
- Ideal for short term applications
- Different adhesive used

Our standard grade adhesive material coated with a clean removable adhesive base, ideal for easy removal one no longer required.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.



Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Safety-GripTM



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black	H3427N	Black U / 9004	0
	Yellow	H3427Y	115U / 1003	51.75

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Safety-Grip - Removable - Hazard - H3427D

Ensures clean removal
Ideal for short term applications
Different adhesive used

Our standard grade adhesive material coated with a clean removable adhesive base, ideal for easy removal one no longer required.

Widths: Maximum 585mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslot retail pack

Safety-Grip™



Colours & light reflectivity values

Colour	code	Pan / RAL	Avg. LRV
Black / Yellow	H3427D	Black U / 9004 115U / 1003	0.75 / 81.50

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [Download data sheet \(PDF\)](#)

Chemical Resistant Safety-Grip - Standard - H3447

- Chemical resistant resin coating
- Copes with long and short term chemical exposure
- Standard grit coating

Designed to provide long term resistance to chemical exposure. Standard grade abrasive grit coating.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack



Colours & light reflectivity values

Colour	code	Pan / RAL	Avg. LRV
Black	H3447N	Black U / 9004	0

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [R118 \(Burning behavior of materials used in the construction of commercial vehicles\)*](#)

* Login required

Chemical Resistant Safety-Grip - Coarse - H3443

- Chemical resistant resin coating
- Copes with long and short term chemical exposure
- Coarse grit coating

Designed to provide long term resistance to chemical exposure. Coarse grade grit coating.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack



Colours & light reflectivity values

Colour	code	Pan / RAL	Avg. LRV
Black	H3443N	Black U / 9004	0

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [R118 \(Burning behavior of materials used in the construction of commercial vehicles\)*](#)

* Login required

Chemical Resistant Safety-Grip - Extra Coarse - H3446

- Chemical resistant resin coating
- Copes with long and short term chemical exposure
- X-Coarse grit coating

Designed to provide long term resistance to chemical exposure. Industrial grade X-Coarse grit coating, the adhesive is our High Grab version as used on H3402NUC.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m.

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack



Colours & light reflectivity values

Colour	code	Pan / RAL	Avg. LRV
Black	H3446N	Black U / 9004	0

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)
- [R118 \(Burning behavior of materials used in the construction of commercial vehicles\)*](#)

* Login required

Marine Safety-Grip - H3460

- For marine based applications
- Kind to bare skin and clothing
- Salt resistant material



A rounded abrasive material suitable for use on boats or other applications that demand an abrasive material but without the harsh sharpness of a conventional abrasive non-slip material.

Widths: Maximum 1168mm, minimum with normal slitting 19mm, minimum width with special blades 10mm (MOQ 10 rolls with all widths less than 19mm quoted at 25mm price).

Lengths: Normally 18.3m

Stock sizes – any shape/width can be produced

25mm x 18.3m
50mm x 18.3m
100mm x 18.3m
140mm x 140mm
150mm x 610mm
50mm Ø disk
TL29 (Boot - 240mm x 90mm)
TL37 (Foot outline - 280mm x 105mm)
TL99 (Full foot - 57mm x 104mm)
TL100 (Full foot - 120mm x 210mm)
TL242 (Boot - 300mm x 120mm)
Numbers (0-9) 400mm high (TL1329-1338)
50mm x 3m roll in euroslet retail pack

Safety-Grip™



Colours & light reflectivity values

	Colour	code	Pan / RAL	Avg. LRV
	Black	H3460N	Black U / 9004	0
	Blue	H3460B	300U / 5017	7
	Grey	H3460S	422U / 7042	24.75
	White	H3460W	705U / 9016	

Coefficient of Friction

Test	Result
Pendulum BS7976 - dry surface	102 PTV
Pendulum BS7976 - wet surface	71 PTV
DIN51130	R13
DIN51097	C
NFSI	High-Traction

Not quite what you're looking for? See also...

- [See this product on our website](#)

Alternatives


Whilst our classic Safety-Grip™ is highly versatile and will work well in many situations there are specialist situations where a different characteristics can be useful.

See online for a more information on each product.



Non Abrasive Anti Slip Tape

The Heskins non-abrasive is class leading, it has products that contain no minerals but have very high levels of coefficient of friction. The range is used for bare foot and applications that demand no scratching or shedding of grit.

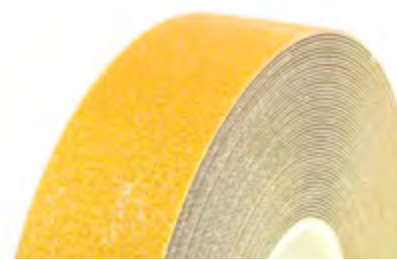

Reflective

Our reflective range encompasses the widest range from basic engineering grades to high performance regulatory approved. We hold certification for EU ECE104, US DOT, US FMVSS amongst others.



Marking Tapes

PermaStripe floor tape is the modern warehouse line marking alternative to resin and paint helping forward thinking companies achieve 5S floor marking status.



Signage – Signs and Markers

The Heskins range of signage helps kit out your workplace to warn guests and employees of potentials hazards, restrictions or to optimise the workplace to increase efficiency.



Ancillaries

Our ancillaries are designed to help the application and extend the life of our products, the ancillaries are specifically engineered for our materials.

Reseller Packaging & Branding

We're keen to support resellers both in the UK, US and across the world.

Many of the well known names in the market use Heskins to manufacture their self adhesive nonslip floor tapes. We can provide our products in almost any type of suitable retail packaging in your own brand design.

Heskins is a GSI registered company, so we can produce internationally recognised EAN or UPC barcodes if you so desire.

Photo Download Suite

Resellers can access our photo download area to obtain high-resolution photos for use in your online and offline marketing. [Register here for your login](#)

Brochures & Sample Cards

We offer brochures & sample cards either Heskins branded or unbranded for your marketing requirements.

We can print retail packs with your branding





Heskins Ltd
Churchill Road Industrial Estate
Brinscall, Chorley
PR6 8RQ
United Kingdom

T +44 (0) 1254 832266
Email mail@heskins.com

Heskins BV
Weena Zuid 130
3012 NC Rotterdam
The Netherlands